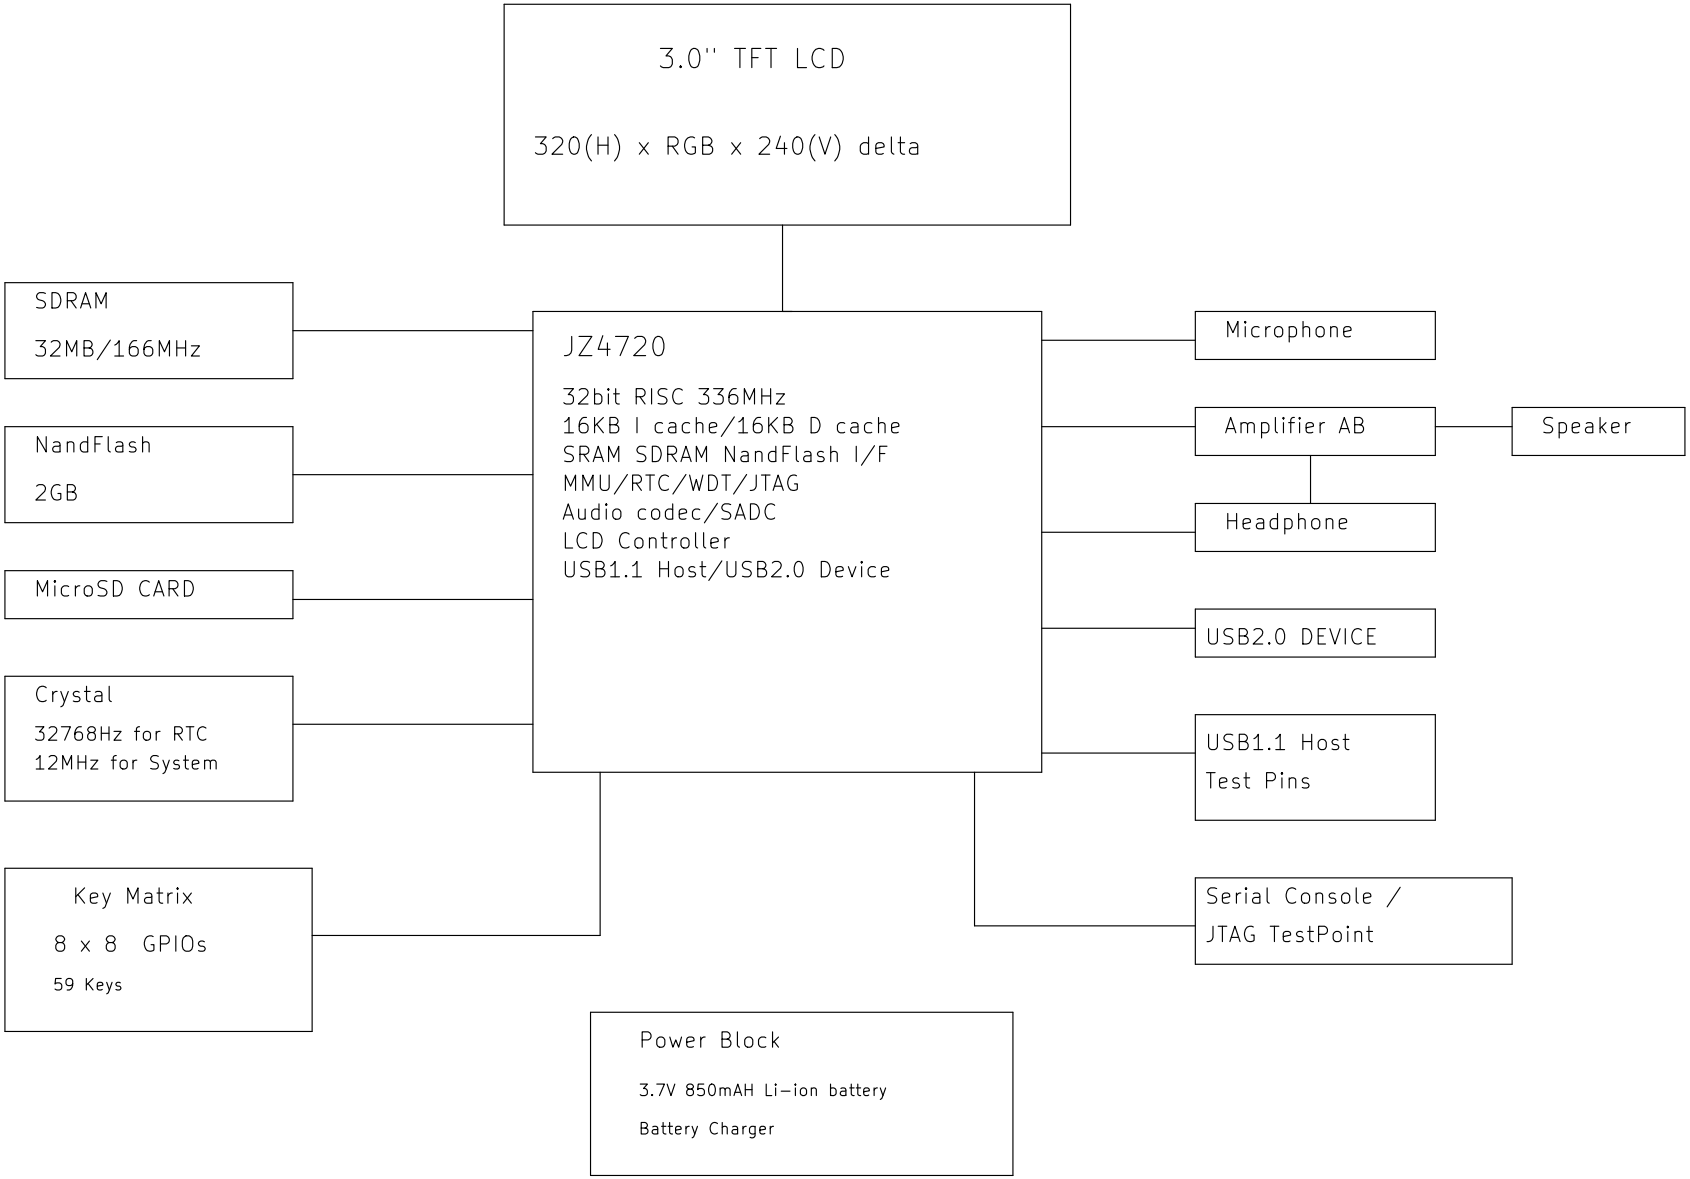
3.0'' TFT LCD
320(H) x RGB x 240(V) delta
SDRAM
32MB/166MHz
NandFlash
2GB
MicroSD CARD
Crystal
32768Hz for RTC
12MHz for System
Key Matrix
8 x 8 GPIOs
59 Keys
JZ4720
32bit RISC 336MHz
16KB I cache/16KB D cache
SRAM SDRAM NandFlash I/F
MMU/RTC/WDT/JTAG
Audio codec/SADC
LCD Controller
USB1.1 Host/USB2.0 Device
Microphone
Amplifier AB
Speaker
Headphone
USB2.0 DEVICE
USB1.1 Host
Test Pins
Serial Console /
JTAG TestPoint
Power Block
3.7V 850mAH Li-ion battery
Battery Charger

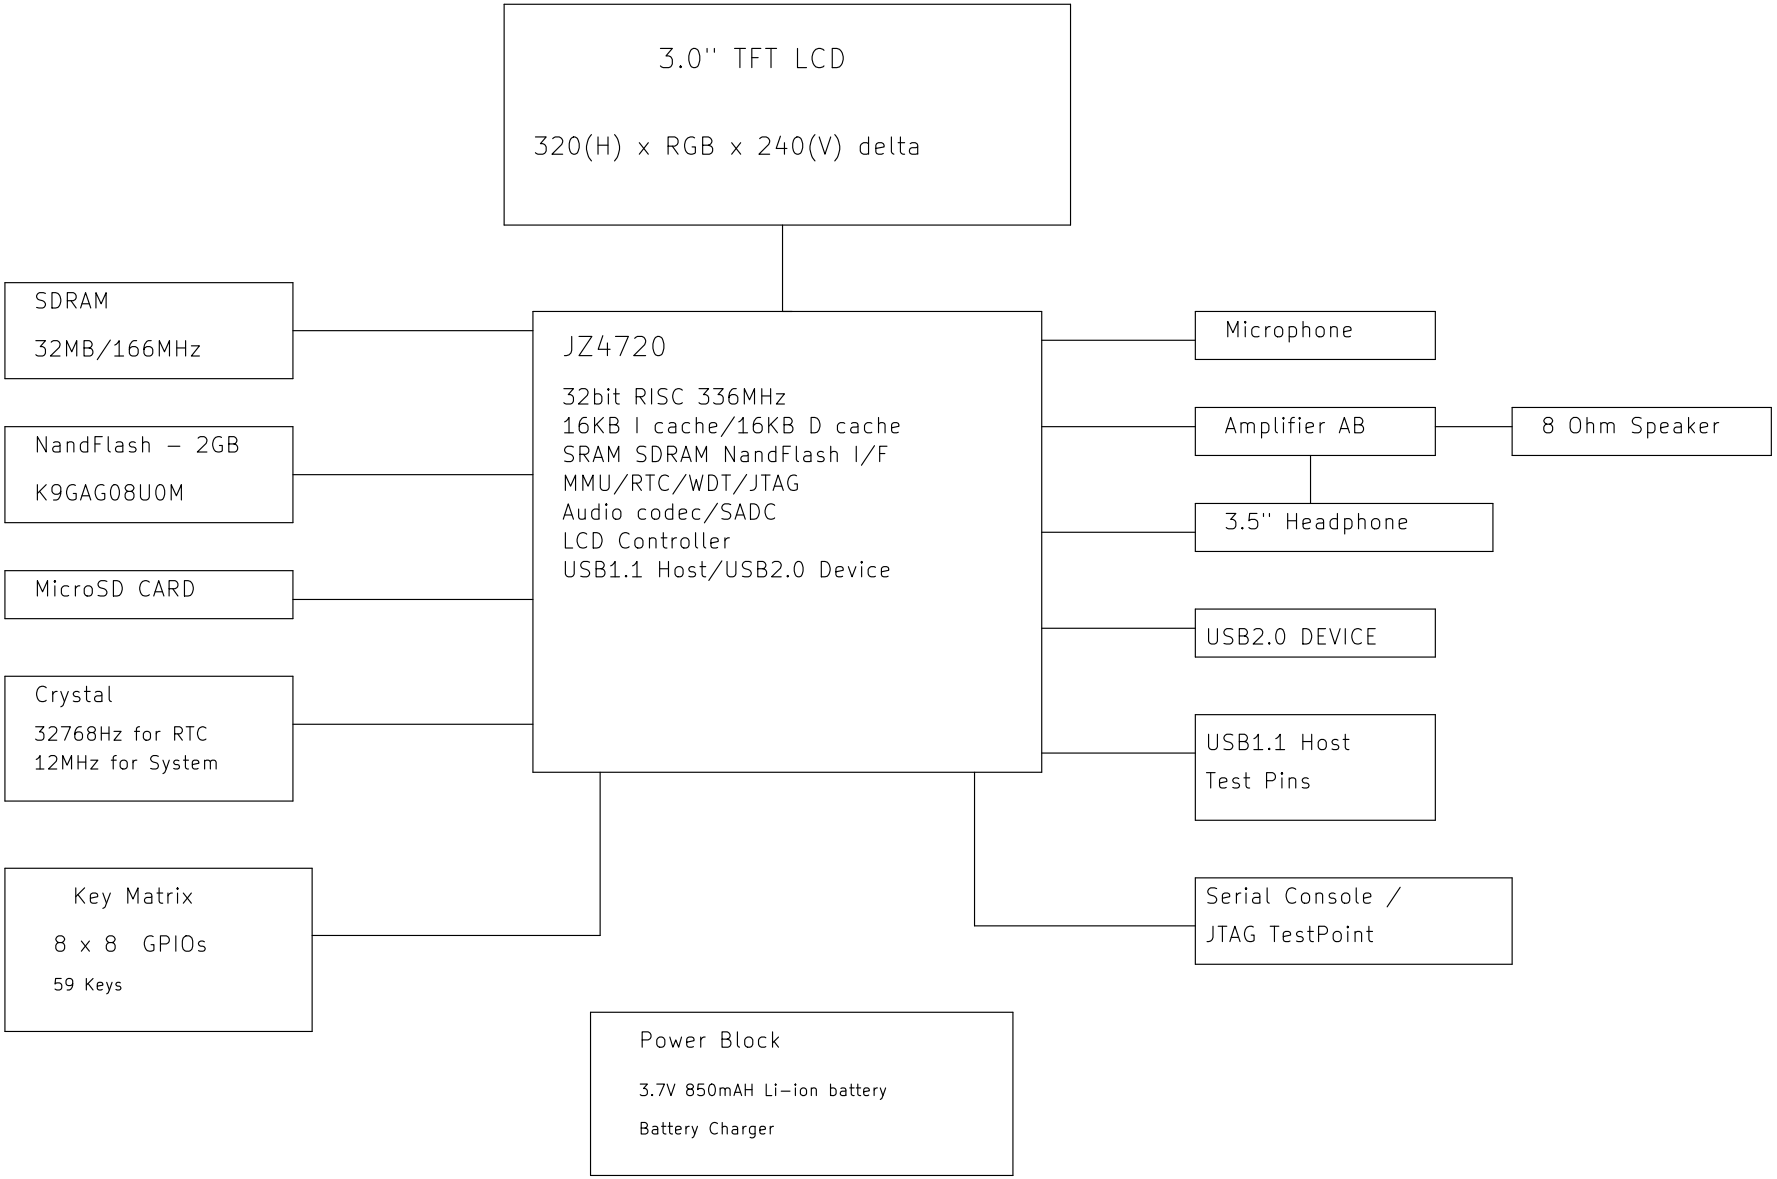
3.0'' TFT LCD
320(H) x RGB x 240(V) delta
SDRAM
32MB/166MHz
NandFlash – 2GB
K9GAG08U0M
MicroSD CARD
Crystal
32768Hz for RTC
12MHz for System
Key Matrix
8 x 8 GPIOs
59 Keys
JZ4720
32bit RISC 336MHz
16KB I cache/16KB D cache
SRAM SDRAM NandFlash I/F
MMU/RTC/WDT/JTAG
Audio codec/SADC
LCD Controller
USB1.1 Host/USB2.0 Device
Microphone
Amplifier AB
8 Ohm Speaker
3.5'' Headphone
USB2.0 DEVICE
USB1.1 Host
Test Pins
Serial Console /
JTAG TestPoint
Power Block
3.7V 850mAH Li-ion battery
Battery Charger